


W416-C6

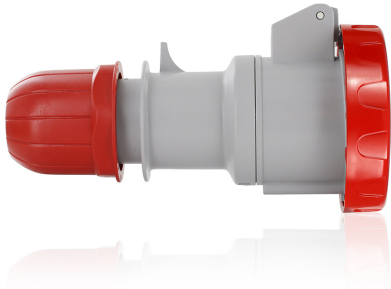

International Pin & Sleeve Connector

16 Amp, 346-415 Volt, 3P+N+E (4P, 5W), Clock Position 6, IEC /EN 60309-1 & 60309-2, International Configuration Connector, Industrial Grade, IP66/67, Watertight - RED

ROHS Compliant : Yes

Technical Information

Electrical Specifications

Amperage : 16 A

Frequency : 50/60Hz

Pole : 4

Voltage : 346-415 VAC

Wire : 5

Environmental Specifications

IK Rating : IK08

IP Rating : IP66/IP67

Operating Temperature : -25°
C to 40°C

Material Specifications

Contacts : Nickel Plated Brass

Housing : Halogen-free
engineering polymer

Mechanical Specifications

Cord Grip Range (in) : .315 - .
590

Terminal Accom. : #16 - #14
AWG

Product Features

Color : Blue

Configuration : International

Device Type : Connector

Standards and Certifications

CE : Marked

IEC Rating : 60309-1 and
60309-2

NOM Certified : Yes

RETIE Certified : Yes

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 ·

Visit our Website at: www.leviton.com

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2025 Leviton Manufacturing Co., Inc.